

# Ball Valves


# BV

## BV15FL & BV20FL FEATURES

- DR Brass
- 15mm and 20mm FL x FL
- Full bore
- Maximum operating temp. to 90°C
- AGA 6515
- Maximum pressure 2500kPa



**BV15FL**  
15mm FL x FL

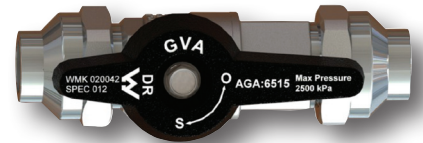


**BV20FL**  
20mm FL x FL




## BV15YFL & BV20YFL FEATURES

- 15mm and 20mm FL x FL
- Full bore
- Maximum operating temp. to 90°C
- AGA 6515
- Maximum pressure 2500kPa

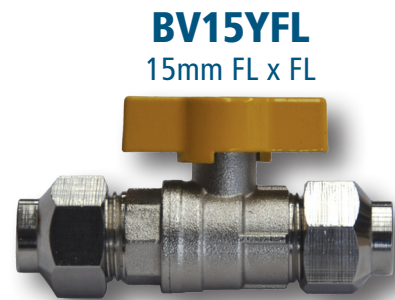


**BV15YFL**  
15mm FL x FL

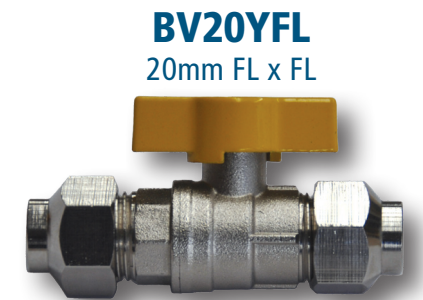

**BV20YFL**  
20mm FL x FL

## BV15C & BV20C FEATURES

- DR Brass
- Compression nut and copper olive
- 15mm and 20mm C x C
- Full bore
- Maximum operating temp. to 90°C
- Watermark ATS 5200.012  
Lic No 020042
- Maximum pressure 2500kPa

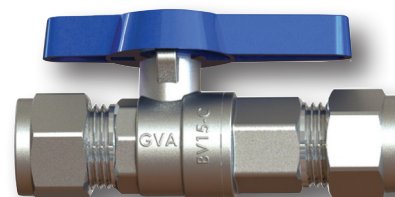

**BV15C**  
15mm C x C



**BV20C**  
20mm C x C

