



ZIP HYDROTAP G5 BC20 CLASSIC CHROME



BOILING



CHILLED

FILTERED

Order Code H51702Z00AU

Zip HydroTap Boiling, Chilled, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code	H51702Z00AU
--------------------	-------------

Capacity	Commercial
----------	------------

Boiling Cups per hour	100
-----------------------	-----

Chilled Cups per hour	75
-----------------------	----

Tap	Zip HydroTap CLASSIC Tap (Chrome)
-----	-----------------------------------

Water Pressure	Min 170kPa - Max 700kPa
----------------	-------------------------

Water Connection	1/2" BSP (G1/2)
------------------	-----------------

Water Supply Requirements	Cold
---------------------------	------

Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
--------------	--

Power Rating	1.9kW 220-240V 50Hz
--------------	---------------------

Power Supply	1 x 10 Amp socket outlet
--------------	--------------------------

Dimensions	W280mm x D455mm x H333mm
------------	--------------------------




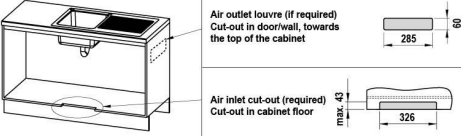

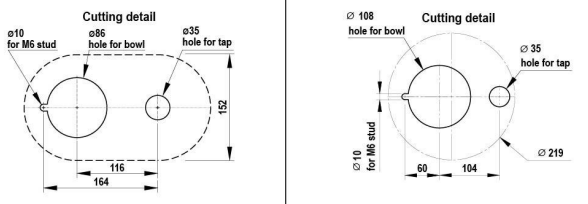
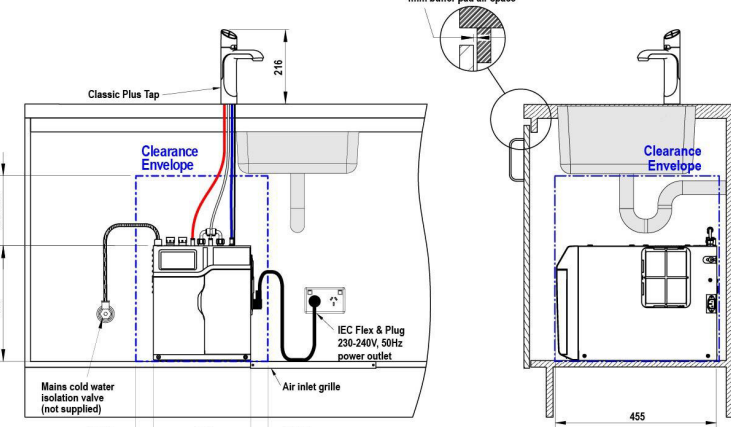
Product Approvals	WaterMark, RCM, ARC
-------------------	---------------------

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

Installation Detail

BK12 HydroTap G5 v1.01.03.21 BC BC20

Ventilation requirements <small>contact your local service provider if ventilation is not suitable</small>	HydroTap Tap options	Font options	
<p>Clearance envelope Position the Tap and the Command Centre as close together as possible.</p> 	<p>Classic Plus 216mm height, 116mm width, 126mm depth, 46mm diameter base.</p> <p>Classic 208mm height, 116mm width, 126mm depth, 46mm diameter base.</p> <p>Elite Plus 221mm height, 117mm width, 134mm depth, 46mm diameter base.</p> <p>Touch-Free Wave 214mm height, 116mm width, 126mm depth, 46mm diameter base.</p> <p>100mm clearance envelope required. For Sink installations, install on the left-hand side of the Sink for ease of access to Boiling water function.</p>	<p>Raised Font with 135mm Extension part no. 95258</p> 	<p>Font with 135mm Extension part no. 90915</p> 
	<p>Tap Positioning Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>35mm hole for HydroTap Tap</p> 	<p>Cutting detail</p> <p>Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>35mm hole for HydroTap Tap</p> 	
			
<p>SCALE 1:5 ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.</p>			

**HydroTap G5
BC20**

shown with "Classic Plus" Tap