

Dual Aerated Safety Eye Wash Spray Head (UWA Version)

Specification Data Sheet



Features

- Twin aerated spray heads.
- Flexible 1800mm hose.
- Stainless steel wall bracket.
- Dust caps with retaining chain.

To Specify

Galvin Specialised emergency eye washes are designed to provide superior protection when emergencies arise. The bench mounted dual aerated eyewash provide great flexibility in laboratories and other industrial areas for flushing the eyes and body. The flexible hose allows the unit to be extended from the wall bracket for direct flushing. Note: Requires control valve that can be purchased separately.

Code:

WS-SE927UWA - Dual Aer Safety Eyewash Spray Head
SE927 - UWA Version



A family
owned
Australian
business




galvinspecialised
commercial taps + fixtures

Performance Standards & Approvals

- Manufactured to comply with AS4775 - 2007

Typical Dimensions

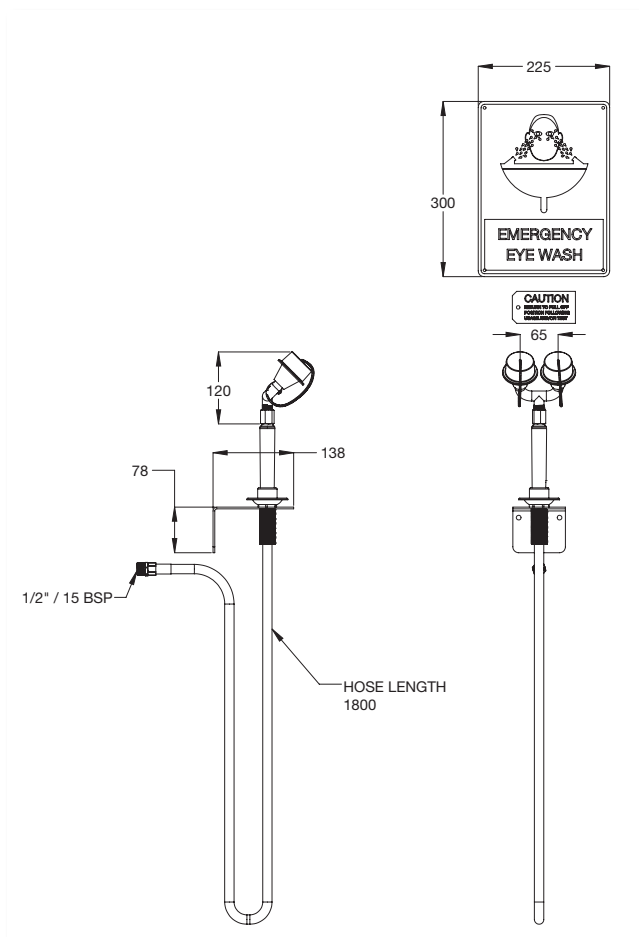

Technical Specification

- Inlet: 1/2" BSP - Male
- Outlet: Aerated, Dual Stream Eye Washes
- Headwork: N/A
- Flow Pressure (kPa): 136
- Flow Rate (LPM): 12
- Construction: Brass
- Finish: Chrome

Testing

The Australian Standard AS 4775 states that all safety equipment shall be activated on a weekly basis to flush the line and verify proper operation. All products furnishes a testing tag with each unit. On this tag the date of the inspection and the inspectors initials should be noted.

Installation

After unpacking carton, ensure all components are present. Mark out the desired position on the bench top (that has a maximum thickness of 57mm). Drill a 25mm - 30mm hole. Mount the unit to the bench top using the hardware supplied. Connect water supply to the unit. Turn water supply on and assure all connections are water tight. Activate the unit and allow to flow for 30 seconds to flush line of any impurities.

Warranty

Galvin Specialised products are covered under our Manufacturer's Warranty at www.galvinengineering.com.au. Galvin Specialised products must be installed in accordance with the installation instructions and in accordance with AS3500 and the PCA, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

Whilst all reasonable care has been taken in compiling the information in this document, the designs, dimensions and products shown are indicative only and should not be relied upon without our prior approval. Due to our policy of continuous development, we reserve the right to alter any details of specifications or products without notice. All information, drawings, technical specifications and product designs remains the property of Galvin Engineering Pty Ltd.

410 Victoria Rd, Malaga, WA 6090

Within Australia: **1300 514 074** Outside Australia: P: +61 (0)8 9249 5900

F: +61 (0)8 9249 5916

sales@galvinengineering.com.au

www.galvinengineering.com.au

ABN: 78 008 719 382

A business unit of

GalvinEngineering 
the mark of reliability

PERTH | SYDNEY | MELBOURNE | BRISBANE | ADELAIDE