

Cim 74ACR

OBLIQUE STRAINER IN DZR BRASS "CR" ALLOY - PN 20



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003.

It can be used for filtration in heating, water, sanitary, pneumatic, oil, gasoline and saturated steam systems, and generally with any non corrosive liquid.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 1982-CC752S.

Nominal Pressure: PN20


Operating temperature: -10 ÷ 180°C

FLOW AND PRESSURE DROP

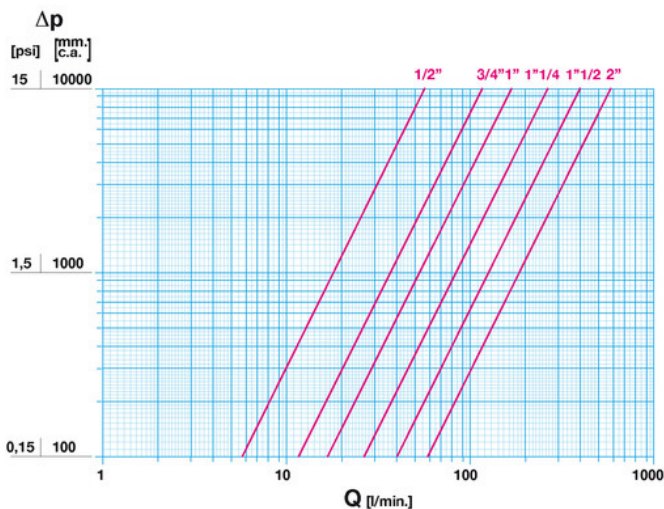


Notes:
 1 l/min = 0,06 m3/h
 1 m3/h = 16,67 l/min
 1 bar = 10.000 mm w.c.
 1 psi = 690 mm w.c.

PRESSURE TEMPERATURE RATINGS

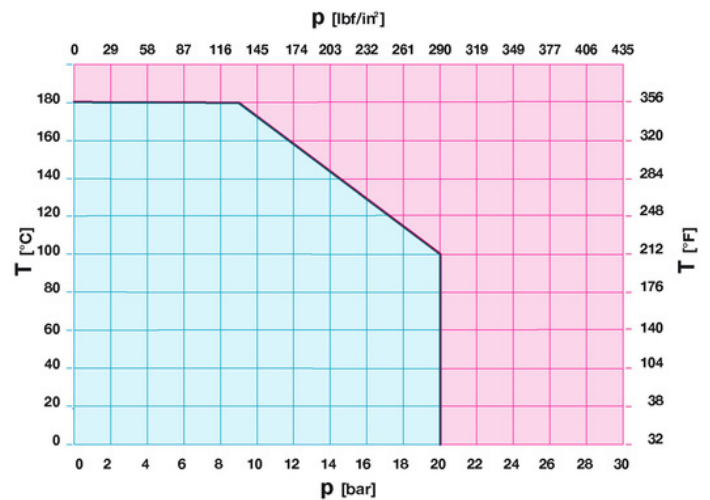

Notes:
 1 bar = 14,5 psi
 1 bar = 14,5 lbf/in2
 °C = 5/9 x (°F-32)
 °F = 32 + (9/5 x °C)

TECHNICAL DRAWING

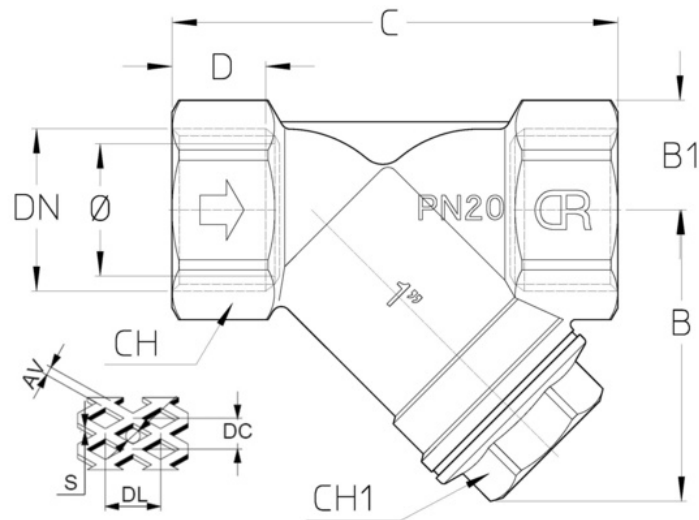

DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Φ mm	15	20	25	32	40	50
Grms.	210	315	455	760	975	1825
B	39	50	60	73	82	100
B1	15,5	18,5	22	28,5	31	39,5
C	68	77	91	108	116	143
D	16,5	18	21	23	23	28
CH	28	33	40	51	56	71
CH1	18	22	29	34	39	55
Φ h μ	650	650	650	650	650	650
N°holes/cm ²	52	52	52	52	52	52

Thread:
ISO 7 - Rp

Upon request:
ISO 7 - Rc
ANSI B1.20.1 - NPT

TECHNICAL CHARACTERISTICS

KV						
DN	1/2"	3/4"	1"	1"1/4	1"1/2	2"
KV	3,4	7	10	16	24	35

KV = Flow rate in m³/h with a pressure drop of 1 bar

OUR CERTIFICATIONS

